


## LED Instant Flexilight - the most popular rope light

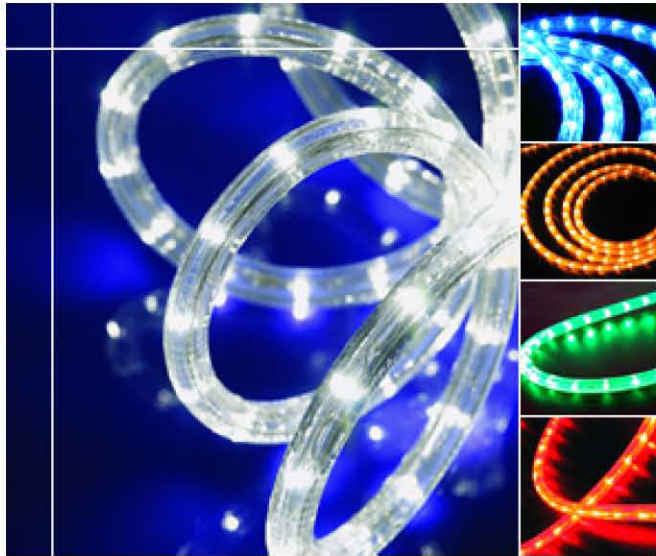

### Long-lasting

Up to 100,000 hours

### Energy-saving

Less than 1 watt per foot

### Durable

LED instead of fragile bulbs

### Ultra-bright

Up to 80 lumens

Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Round	1/2" Diameter	1"	2	150' / 153', 200'

Voltage	12V	24V	110V/120V	220V/240V
Wattage	0.88W/Foot White/Blue/Emerald  0.44W/Foot Red/Green/Yellow	0.88W/Foot White/Blue/Emerald  0.44W/Foot Red/Green/Yellow	0.8W/Foot White/Blue/Emerald  0.53W/Foot Red/Green/Yellow	0.8W/Foot White/Blue/Emerald  0.53W/Foot Red/Green/Yellow
Max Run	50' White/Blue/Emerald  100' Red/Green/Yellow	100' White/Blue/Emerald  200' Red/Green/Yellow	600' White/Blue/Emerald  900' Red/Green/Yellow	1200' White/Blue/Emerald  1800' Red/Green/Yellow
Unit Length	3" White/Blue/Emerald  6" Red/Green/Yellow	6" White/Blue/Emerald  12" Red/Green/Yellow	36" White/Blue/Emerald  54" Red/Green/Yellow	72" White/Blue/Emerald  108" Red/Green/Yellow

LED Instant Flexilight is the most popular rope light using next-generation LED technologies. It's the easiest way to provide a long-lasting and cost-effective lighting solution. Available in both vertical and horizontal bulb insertion versions, LED Instant Flexilight suits every application of yours, whatever your taste or mood is.

**\*\*\* Almost all our traditional incandescent Flexilight models can be made with LED. Please call us for more details on all the varieties of LED Flexilight.**

## Instant Flexilight - the classic and the standard of rope light



Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Round	1/2" Diameter	1"	2	12', 18', 24', 30', 50', 150', 200'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	2.52W/Foot	2.52W/Foot	3W/Foot	5.52W/Foot
<b>Max Run</b>	30'	60'	200'	300'
<b>Unit Length</b>	4"	8"	24"	36"

## Mini Flexilight - the thinnest and the most flexible rope light



Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Round	3/8" Diameter	1"	2	150', 200'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	2.52W/Foot	2.52W/Foot	3W/Foot	5.52W/Foot
<b>Max Run</b>	30'	60'	200'	300'
<b>Unit Length</b>	4"	8"	24"	36"

## Chasing Flexilight - the most affordable way to create a dynamic lighting effect



Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Round	1/2" Diameter	1"	3	148', 200'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	2.52W/Foot	2.52W/Foot	3W/Foot	5.52W/Foot
<b>Max Run</b>	30'	60'	200'	300'
<b>Unit Length</b>	8"	16"	48"	72"


## Bi-Color Chameleon Flexilight - a groovy chic with gradual color changing



Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Round	1/2 " Diameter	1 "	3	148 ', 200 '

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Watt age</b>	2.52W/Foot	2.52W/Foot	3W/Foot	5.52W/Foot
<b>Ma x Run</b>	30'	60'	200'	300'
<b>Unit Length</b>	8 "	16 "	48 "	72 "

## Super-Chasing Flexilight - creating single color or 3-color directional chasing effect

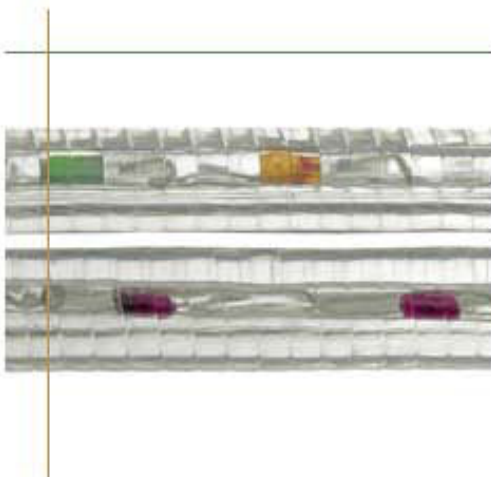

Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Round	9/16 " Diameter	1 "	4	148 '

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Watt age</b>	2.52W/Foot	2.52W/Foot	5.52W/Foot	5.52W/Foot
<b>Ma x Run</b>	30'	60'	148'	295'
<b>Unit Length</b>	12 "	24 "	54 "	108 "

## Multi-Chasing Flexilight - creating single color or 4-color directional chasing effect



Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Round	5/8 " Diameter	1 "	5	150'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Watt age</b>	2.52W/Foot	2.52W/Foot	5.52W/Foot	5.52W/Foot
<b>Ma x Run</b>	30'	60'	150'	300'
<b>Unit Length</b>	16 "	32 "	72 "	144 "


## Super Instant Flexilight - a brighter classic with more light bulbs



Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Round	1/2" Diameter	0.82"	2	148'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	3.07/Foot	3.07W/Foot	6.73/Foot	6.73W/Foot
<b>Max Run</b>	27'	54'	148'	295'
<b>Unit Length</b>	6.56"	13.12"	14.76"	29.52"

## Super-Brite Instant Flexilight - 140% brighter and 25% thicker than Instant Flexilight

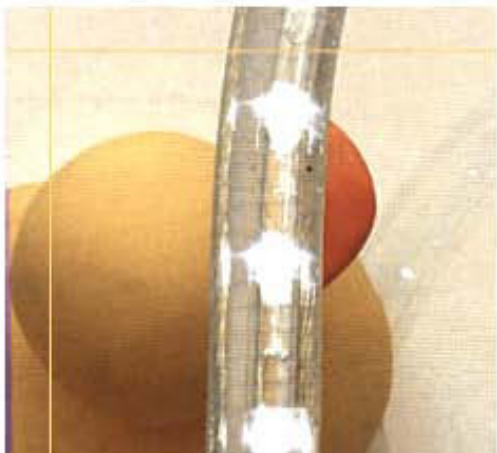

Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Round	5/8" Diameter	0.98"	2	164'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	-	-	7.32W/Foot	7.32W/Foot
<b>Max Run</b>	-	-	120'	240'
<b>Unit Length</b>	-	-	19.68"	39.36"

## Super-Brite Chasing Flexilight - 140% brighter and 25% thicker than Chasing Flexilight



Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Round	5/8" Diameter	0.98"	3	164'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	-	-	7.32W/Foot	7.32W/Foot
<b>Max Run</b>	-	-	120'	240'
<b>Unit Length</b>	-	-	39.36"	78.72"


## Square Instant Flexilight - a square version of the popular Instant Flexilight



Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Square	1/2" x 1/2"	1"	2	150'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	2.52W/Foot	2.52W/Foot	5.52W/Foot	5.52W/Foot
<b>Max Run</b>	30'	60'	150'	300'
<b>Unit Length</b>	4"	8"	18"	36"

## Square Mini Flexilight - a square version of the popular Mini Flexilight

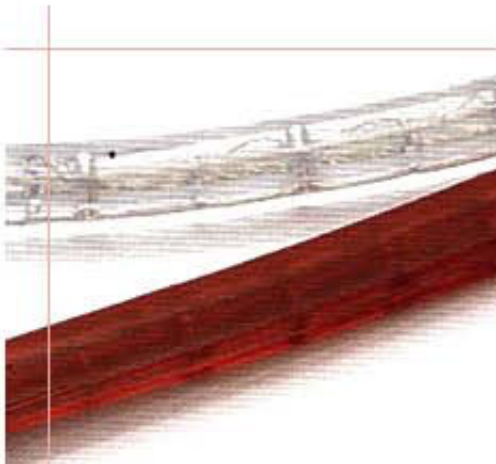

Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Square	3/8" x 3/8"	1"	2	150'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	2.52W/Foot	2.52W/Foot	5.52W/Foot	5.52W/Foot
<b>Max Run</b>	30'	60'	150'	300'
<b>Unit Length</b>	4"	8"	18"	36"

## Square Chasing Flexilight - a square version of the popular Chasing Flexilight



Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Square	1/2" x 1/2"	1"	3	150'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	2.52W/Foot	2.52W/Foot	5.52W/Foot	5.52W/Foot
<b>Max Run</b>	30'	60'	150'	300'
<b>Unit Length</b>	8"	16"	36"	72"

## Rectango Instant Flexilight - a flat rope light with great brightness



Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Rectangular	2/5" x 7/10"	0.98"	2	148'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	2.56W/Foot	2.56W/Foot	7.32W/Foot	7.32W/Foot
<b>Max Run</b>	30'	60'	120'	240'
<b>Unit Length</b>	3.94"	7.87"	19.68"	39.36"

\* The above tech specs are for vertically inserted bulbs. Those for horizontally inserted bulbs will differ. Please call for more details.

## Rectango Chasing Flexilight - a flat chasing rope light with great brightness




Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Rectangular	2/5" x 7/10"	0.55"	3	148'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	5W/Foot	5W/Foot	10.1W/Foot	10.1W/Foot
<b>Max Run</b>	15'	30'	75'	150'
<b>Unit Length</b>	4"	8"	19.68"	39.36"

\* The above tech specs are for horizontally inserted bulbs. Those for vertically inserted bulbs will differ. Please call for more details.

## Rectango Rainbow Flexilight - the largest Flexilight with the most versatile lighting effect

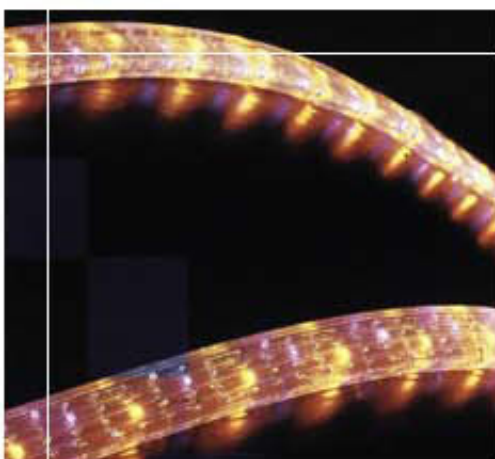

Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Rectangular	8/17" x 8/7"	0.55"	5	148'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	5W/Foot	5W/Foot	10.1W/Foot	10.1W/Foot
<b>Max Run</b>	15'	30'	75'	150'
<b>Unit Length</b>	8"	16"	39.36"	78.72"

## Xtra-Brite Instant Flexilight - the brightest Flexilight, thanks to its reflective band



Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Rectangular	2/5" x 7/10"	0.98"	2	148'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	2.56W/Foot	2.56W/Foot	7.32W/Foot	7.32W/Foot
<b>Max Run</b>	30'	60'	120'	240'
<b>Unit Length</b>	3.94"	7.87"	19.68"	39.36"

## Xtra-Brite Chasing Flexilight - the brightest Flexilight in a 3-wire chasing model



Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Rectangular	2/5" x 7/10"	0.82"	3	148'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	3.07W/Foot	3.07W/Foot	6.73W/Foot	6.73W/Foot
<b>Max Run</b>	27'	54'	148'	295'
<b>Unit Length</b>	6.56"	13.12"	29.52"	59.04"

## Roman Twist Flexilight - enhanced visual effect with its uniquely twisted surface pattern



Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Round	1/2"	1"	2	150'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	2.52W/Foot	2.52W/Foot	5.52W/Foot	5.52W/Foot
<b>Max Run</b>	30'	60'	150'	300'
<b>Unit Length</b>	4"	8"	18"	36"

\* Also available in 3/8" 2-wire and 1/2" 3-wire models.

## Galactic Flexilight - a rope light that sparkles and glitters day and night




Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Round	1/2 "	1 "	2	150'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	2.52W/Foot	2.52W/Foot	5.52W/Foot	5.52W/Foot
<b>Max Run</b>	30'	60'	150'	300'
<b>Unit Length</b>	4"	8"	18"	36"

\* Also available in 3/8" 2-wire and 1/2" 3-wire models.

## Seamless Rainbow Flexilight - color light bulbs covered in a pearl white PVC tube

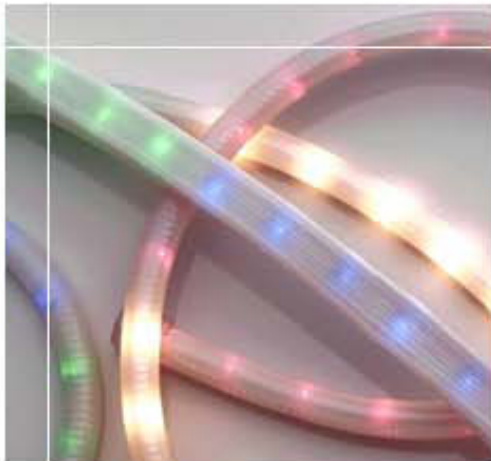

Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Round	1/2 "	1 "	2	150'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	2.52W/Foot	2.52W/Foot	5.52W/Foot	5.52W/Foot
<b>Max Run</b>	30'	60'	150'	300'
<b>Unit Length</b>	4"	8"	18"	36"

\* Also available in other models. Please call for details.

## Joker Flexilight - a playful rope light with a colorful PVC surface



Shape	Thickness	Bulb Spacing	No. of Wires	Packages
Round	1/2 "	1 "	2	150'

<b>Voltage</b>	12V	24V	110V/120V	220V/240V
<b>Wattage</b>	2.52W/Foot	2.52W/Foot	5.52W/Foot	5.52W/Foot
<b>Max Run</b>	30'	60'	150'	300'
<b>Unit Length</b>	4"	8"	18"	36"

\* Also available in 3/8" 2-wire and 1/2" 3-wire models.